



PUMP CASING D-59328	SIZE 3 X 1-1/2 X 10	MODEL NC-A50-10
IMPELLER D-59325	IMP. EYE AREA 5.940 sq. in.	RPM ACTUAL (1750 Typical)
SERIAL #	IMP. DIA. RANGE	

Curves are based on shop test while handling clean water at 20°C and at sea level. Performance guarantees apply at rating point only. Efficiencies shown are pump hydraulic. Numbers beneath model designations indicate full load horsepower ratings for the referenced motor load lines. When pumping fluids with specific gravities other than 1.0, select pump model (see load line) to handle load equivalent in feet of water. e.g, 40 feet of fluid of Sp. Gr.=1.5 is load equivalent of 60 feet (1.5x40) of water. Please note that this is merely a short cut method to estimate the model required. For proper model selection, especially when handling a fluid with a Sp. Gr. greater than 1.7, consult your Chempump representative or the factory.

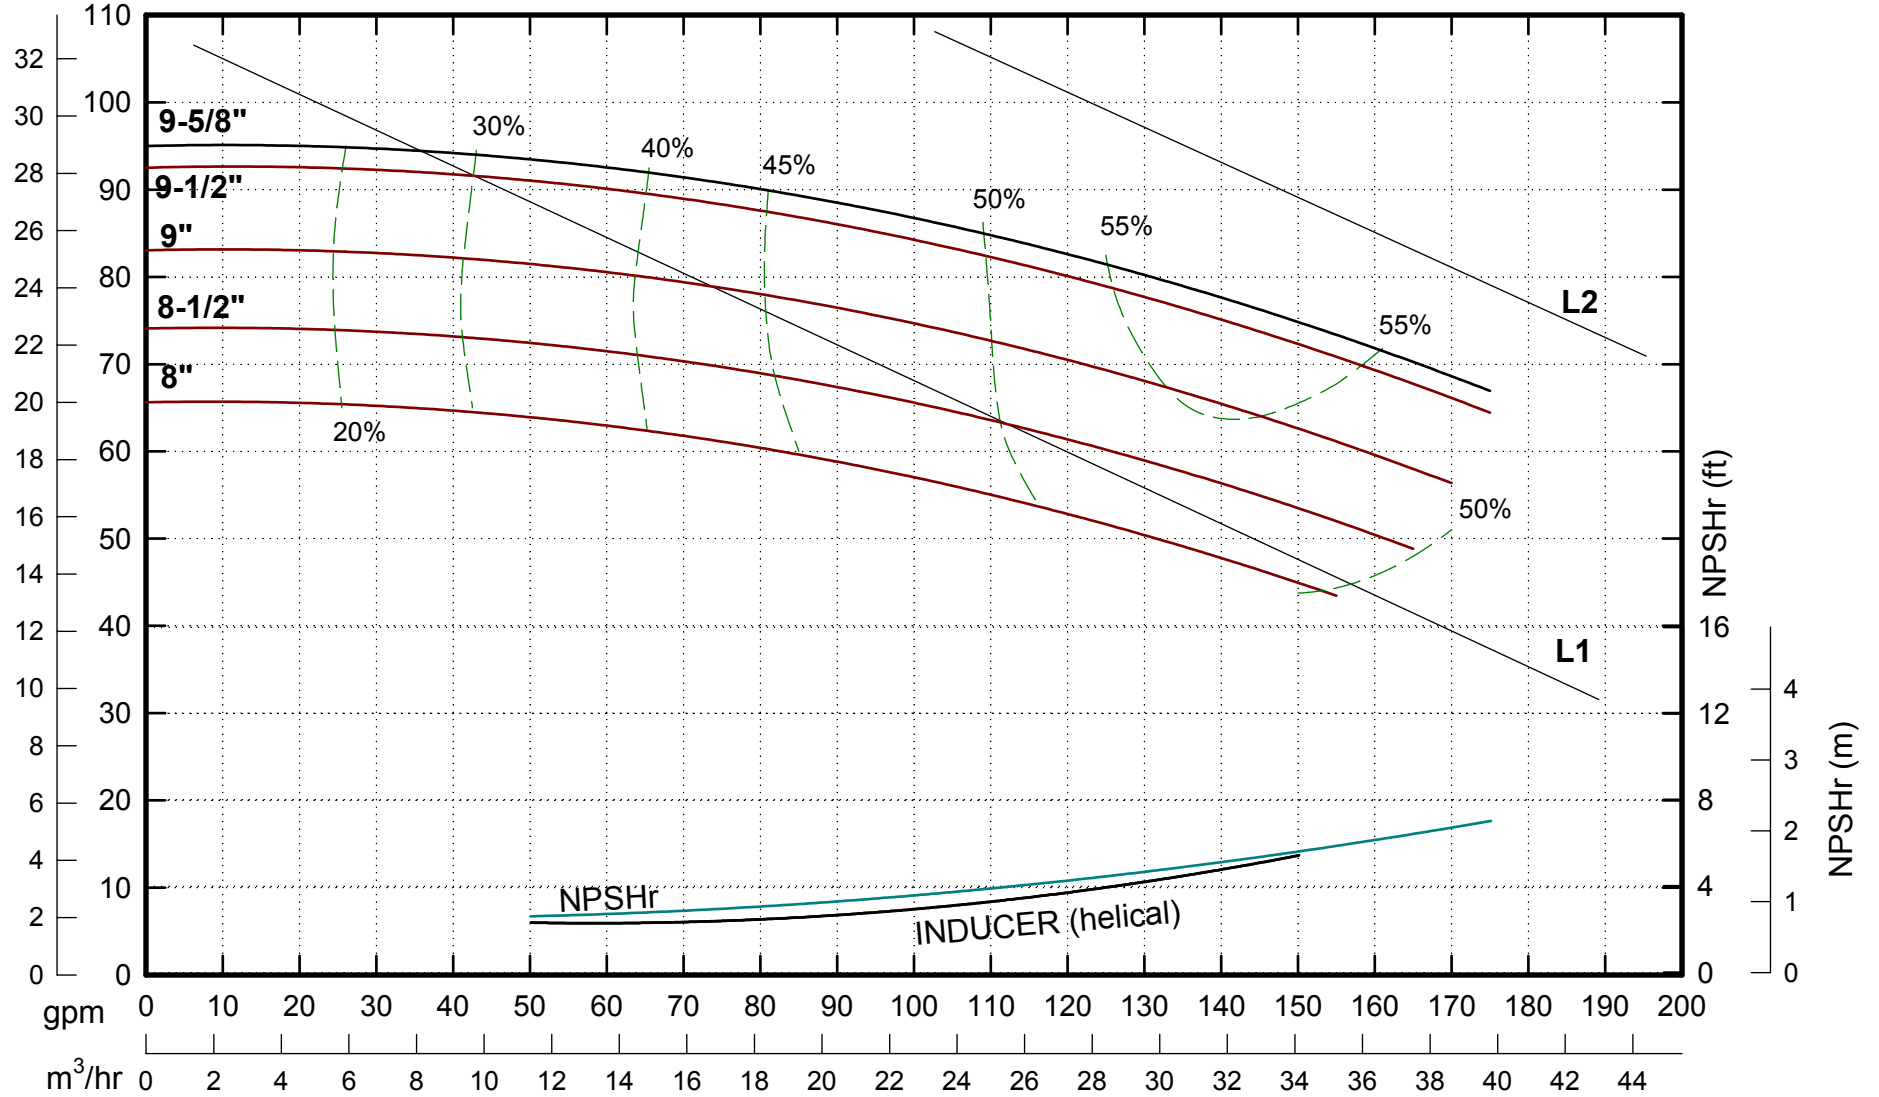

 CHEMPUMP A DIVISION OF TEIKOKU USA INC. www.chempump.com www.teikoku-usa.com	DRAWN	DATE	CURVE	REV.
	SAJ	05-09-00	A-70208	